

## DTB-S95M Label

### Air Interface Protocol

EPC Global Class1 Gen2 ISO18000-6C

### Operational Frequency

Global 860-960 MHz

### Tag Size


100 \* 30 mm



Mechanical Parameters	
Inlay Base Material	PET
Face Material	50um Bright PET
Liner	Glassine Paper
Quantity	2500PCS/Roll (Can Be Customized)
Reel Inner Diameter	76.2 mm
Tag Size	100 * 30 mm
Antenna Size	95 * 25 mm

Electrical Parameters	
Air Interface Protocol	EPC Global Class1 Gen2 ISO18000-6C
Frequency	Global 860-960 MHz
IC Type	Impinj Series (Check chip parameter)
IC Life	100,000 Times
Data Retention	10 Years
Application Surface	Non Metal Surface
Reading Range	≧ 10 m (US Standard, Handheld 1W)

Other Parameters	
Operating Temperature	-20°C ~ 80°C
Storage Temperature	20°C ~ 30°C
Storage Humidity	20-90 % Relative Humidity
Shelf Life	20°C ~ 30°C, 40 ~ 60% Relative Humidity, More Than 2 Years

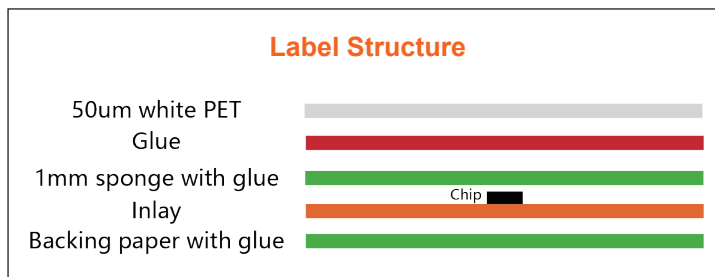

Chip Parameter							
Impinj Series (Customizeter)	Chip Parameter	M730	M750	M780	M781	M830	M850
	EPC	128 bits	96 bits	496 bits	128 bits	128 bits	96 bits
	TID	96 bits	96 bits	96 bits	96 bits	96 bits	96 bits
	User Area	0	32 bits	128 bits	512 bits	0 bits	32 bits

